


CBB60 圆形干式单相电机电容器 Round Single Phase Motor Starting and Running Dry Capacitor

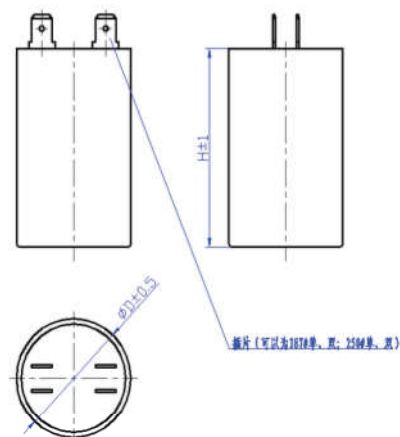

引出端样式可根据客户要求设计
Terminal style can be designed as customer's requirement.

电压 (VAC)	容量 (μ F)	ΦD		H	
		in	mm	in	mm
450	1	1.18	30.00	1.85	47
450	1.2	1.18	30	1.85	47
450	1.5	1.18	30	1.85	47
450	2.0	1.18	30	1.85	47
450	2.5	1.18	30	1.85	47
450	3	1.18	30	1.85	47
450	3.5	1.18	30	1.85	47
450	4	1.18	30	1.97	50
450	5	1.18	30	2.36	60
450	6	1.18	30	2.36	60
450	7.5	1.38	35	2.28	58
450	8	1.38	35	2.28	58
450	10	1.38	35	2.28	58
450	12	1.38	35	2.56	65
450	14	1.38	35	2.95	75
450	15	1.38	35	2.95	75
450	18	1.57	40	2.76	70
450	20	1.57	40	2.76	70
450	22	1.77	45	2.76	70
450	25	1.77	45	2.76	70
450	30	1.77	45	3.15	80
450	35	1.77	45	3.54	90
450	40	1.77	45	3.94	100
450	45	1.77	45	4.33	110